
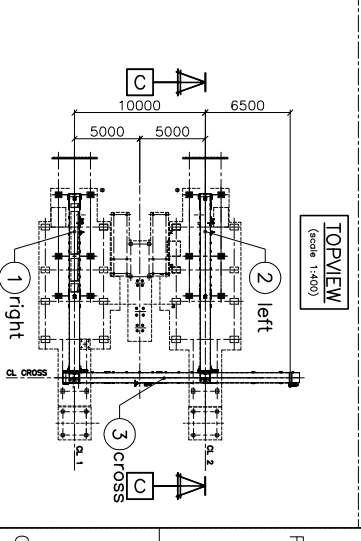
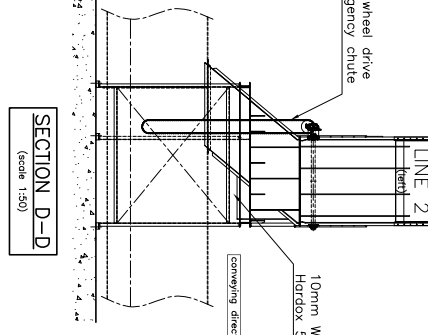


- LEGENDA:**
- A PRESSURE TRANSMITTER: VEGABAR 82 INCL. 1" BALL VALVE WITH HOSE CONNECTION FOR FLUSHING
 - B WATERSUPPLY CONNECTION DN60 PN16 THREADED INCL. PNEUMATIC ACTUATOR (110VAC)
 - C WATERSUPPLY CONNECTION DN60 PN16 THREADED FRESH WATER PNEUMATIC ACTUATOR (RE-USED) BY CUSTOMER
 - D OVERFLOWBOX DN100 PN16
 - E WATER DRAINAGE DN150 PN16 GATE VALVE INCL. 1" BALL VALVE WITH HOSE CONNECTION FOR FLUSHING ROTATION INDICATOR
 - F RPM DRIVE (24VDC)
 - G CONNECTION FOR VAPOUR EXTRACTION 2x AT DISCHARGE CHUTE (SAME POSITION AS OLD CONVEYOR) 2x AT INCLINED PART (ADDITIONAL NEW CONNECTION) DN200-PN16

TECHNICAL SPECIFICATIONS

FRAME	STEEL PAN CONVEYOR -COVERLAYS 8mm (S235JR) -COVERLAYS 5mm (S235JR) -ANGONA RAILS IN TOP AND BOTTOM STRAND	PAINT	SHOTBLASTING SA 2,5 IN ACCORDANCE TO DIN 55928 (INSIDE + OUTSIDE)
BELT CHAIN	MF-2908-120; 188-RF 4; S235JR 8mm 8mm	INSIDE	1 COAT 2 COMP. ZINC-PHOSPHATE PRIMER 50UM 2 COMP. EPOXY COATING TYPE SIGMA-DUR 625
CAPACITY	LINKERS AND SIFTINGS HANDLED MATERIAL CONVEYOR CAPACITY	OUTSIDE	1 COAT 2 COMP. ZINC-PHOSPHATE PRIMER 50UM TYPE SIGMA-COVER 256 2 COMP. POLYURETHANE FINISH 50UM TYPE SIGMA-DUR 550
BULK DENSITY	CLINKERS AND SIFTINGS FROM WTE PLANT 4000kg/m ³ NOMINAL 6500kg/m ³ DESIGN	COLOR OF CONVEYOR	RAL 7035 (LIGHT GREY)
WATER TEMPERATURE	800-1500kg/m ³ MAX. 70 °C. (no frame insulation)	COLOR OF DRIVE	RAL 2002 (VERMILION)

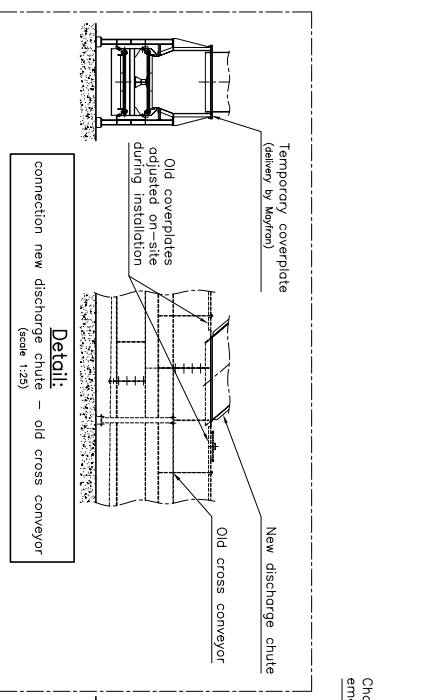

NO.	REVISION DESCRIPTION	DATE	BY
1	ISSUE FOR CONSTRUCTION	14-08-2018	WRT
2	REVISION: ADDITIONAL CONNECTIONS	14-08-2018	WRT
3	REVISION: ADDITIONAL CONNECTIONS	14-08-2018	WRT

250mm ASHCONVEYOR W=1200
Project: Bydgoszcz Line 2 (left)
Customer: termomeccanica
Order n.: 1853080

3RD ANGLE	ITEM NUMBER	DRAWING NUMBER	REV
		T146510	00

STATUS: 200 Released
VER: 00

